



RESPONSE CAPABILITIES ANALYSIS

Relocation of Fire Station 3 and the Newport Transportation Center

NEWPORT BEACH FIRE DEPARTMENT

Newport Beach, California

Prepared and published by the Newport Beach Firefighters Association

keepingnewportsafe.com

July 2026

Paid for by Newport Beach Firefighters Association PAC

Not Authorized by a candidate or a committee controlled by a candidate.

This report is dedicated to the residents, workers, and visitors of Newport Beach, California, who deserve the most efficient and effective fire, rescue, and emergency medical services available.

Executive Summary

Background

The Newport Beach Firefighters Association conducted a road-network response capabilities analysis to evaluate the proposed relocation of Fire Station 3 from 868 Santa Barbara Drive to the Newport Transportation Center site at 1550 Avocado Avenue. The analysis applies the Newport Beach Fire Department's station locations, frontline unit staffing, and dispatch protocols to a calibrated street-network travel time model, and measures results against NFPA 1710, the national consensus standard for career fire department deployment.^[7]

The City of Newport Beach commissioned a Standards of Coverage and Deployment Plan in 2022.^[1] That study documented travel time deficiencies in the southeastern residential areas served by Station 3 and recommended reductions in incident travel time. Its deployment models held all eight existing station locations fixed; the Avocado Avenue site was not evaluated. In June 2025, the City Council voted 6-0 to request the support of the Orange County Transportation Authority in relocating Fire Station 3 to the Avocado Avenue site.

^[2] A cooperative agreement and term sheet between the City and OCTA now govern a jointly overseen relocation feasibility process for the transportation center,^[5] and on July 28, 2026 the City Council voted 7-0 to initiate a memorandum of understanding.^[6]

Key Findings

- Network response analysis revealed that relocation of Station 3 to the Avocado Avenue site would reduce first-due travel time to the Port Streets from 5 minutes 15 seconds to 2 minutes 52 seconds, to the Harbor Hills Views and Spyglass area from 4 minutes 41 seconds to 2 minutes 52 seconds, and to the Bonita Canyon and Ford Road corridor from 4 minutes 49 seconds to 3 minutes 43 seconds, on measured driving routes with the City's existing Opticom signal preemption applied. Three areas of the city fall outside the NFPA 1710 four-minute first-due travel objective under the current configuration. Under the proposed configuration, every area evaluated meets the objective, and the citywide maximum first-due travel estimate falls from 5 minutes 15 seconds to 3 minutes 52 seconds. First-due figures throughout this report reflect the first-arriving unit from any Newport Beach fire station; driving distances for the contested corridors are measured commercial-mapping routes verified by the Association.
- Areas nearest the current station would give back time measured in seconds while the underserved corridors gain time measured in minutes. On measured routes with preemption applied, Eastbluff moves from 2 minutes 39 seconds to 3 minutes 52 seconds, Park Newport from 1 minute 32 seconds to 2 minutes 49 seconds, Sea Island from 1 minute 58 seconds to 3 minutes 8 seconds, and Corona del Mar High School from 2 minutes 14 seconds to 3 minutes 9 seconds. All remain within the four-minute objective.
- For a structure fire or major traffic collision in the Eastbluff corridor, the time to assemble the full dispatched complement of two engines, one truck, one ambulance, and one battalion chief is unchanged by the relocation. Assembly of the full complement is governed by the second-due engine responding from Station 7, whose route is unaffected.
- For a structure fire in the Port Streets, four of the five dispatched units would arrive more than two minutes sooner, with first water, first ladder, first ambulance, and command arriving at an estimated 4.8 minutes from dispatch rather than 7.1 minutes.
- The relocation redeploys the existing Station 3 crews and requires no additional permanent staffing. The alternative concept identified in the 2022 study, construction of a ninth station, would require land the City

does not control, a new engine company of approximately 12 to 15 personnel, and an estimated four million dollars per year in permanent staffing cost.

Recommendations

- The relocation of Fire Station 3 to the 1550 Avocado Avenue site should proceed through the established City and OCTA process.
- The Newport Transportation Center should be relocated to a replacement facility through the jointly governed feasibility process, preserving transit function and satisfying all Federal Transit Administration requirements.^[3]
- Traffic signal preemption on the Jamboree Road and San Joaquin Hills Road corridors should accompany the relocation to offset the modest travel time increase to the Eastbluff corridor.

Conclusion

Response analysis on measured driving routes revealed that the proposed relocation would materially improve first-due coverage in the areas of the city with the greatest documented travel time deficiencies, while the affected neighborhoods nearest the current station give back time measured in seconds, retain full first-alarm coverage on an unchanged schedule, and remain within the four-minute objective. The relocation achieves these improvements with existing personnel and apparatus. Any delay in the initiation of fire suppression, rescue, or emergency medical intervention translates directly into increased risk of property loss, injury, and death. On the record and on the data, the relocation of Fire Station 3 is a public safety improvement for the City of Newport Beach.

1. Current Situation

The Newport Beach Fire Department provides fire suppression, rescue, and emergency medical services from eight fire stations. Station 3, located at 868 Santa Barbara Drive in Newport Center, houses one of the department's two truck companies and one of its four ambulances. The position of Station 3 therefore determines ladder and transport coverage for the eastern half of the city in addition to first-due engine coverage within its own district.

1.1 Station Locations and Frontline Staffing

Station	Location	Frontline staffing
1	110 E. Balboa Blvd (Balboa Peninsula)	Engine: Captain, Engineer, Firefighter Paramedic
2	2807 Newport Blvd (Lido)	Engine: Captain, Engineer, FFPM. Truck: Captain, Engineer, FF, FFPM. Ambulance: 2 FFPM
3	868 Santa Barbara Dr (Newport Center)	Engine: Captain, Engineer, FFPM. Truck: Captain, Engineer, FFPM, FF. Ambulance: 2 FFPM
4	124 Marine Ave (Balboa Island)	Engine: Captain, Engineer, FFPM
5	410 Marigold Ave (Corona del Mar)	Engine: Captain, Engineer, FFPM. Ambulance: 2 FFPM
6	1348 Irvine Ave (Mariners)	Engine: Captain, Engineer, FFPM
7	20401 Acacia St (Santa Ana Heights)	Engine: Captain, Engineer, FFPM. Ambulance: 2 FFPM
8	6502 Ridge Park Rd (Newport Coast)	Engine: Captain, Engineer, FFPM

Table 1. Current fire station locations and frontline staffing, as provided by the Newport Beach Firefighters Association, July 2026.

1.2 Dispatch Protocols and Personnel

Engines are staffed with three personnel: a company officer, an engineer, and a firefighter paramedic. Trucks are staffed with four. Ambulances are staffed with two firefighter paramedics. The dispatched response builds with the emergency:

- Medical emergency: the closest engine or truck, plus one ambulance. Five to six personnel.
- Reported structure fire or traffic collision: two engines, one truck, one ambulance, and one battalion chief. Thirteen personnel.
- Confirmed working fire: four engines, two trucks, one ambulance, and one battalion chief. Twenty-three personnel, drawing apparatus from across the city.

What Responds When You Call 911

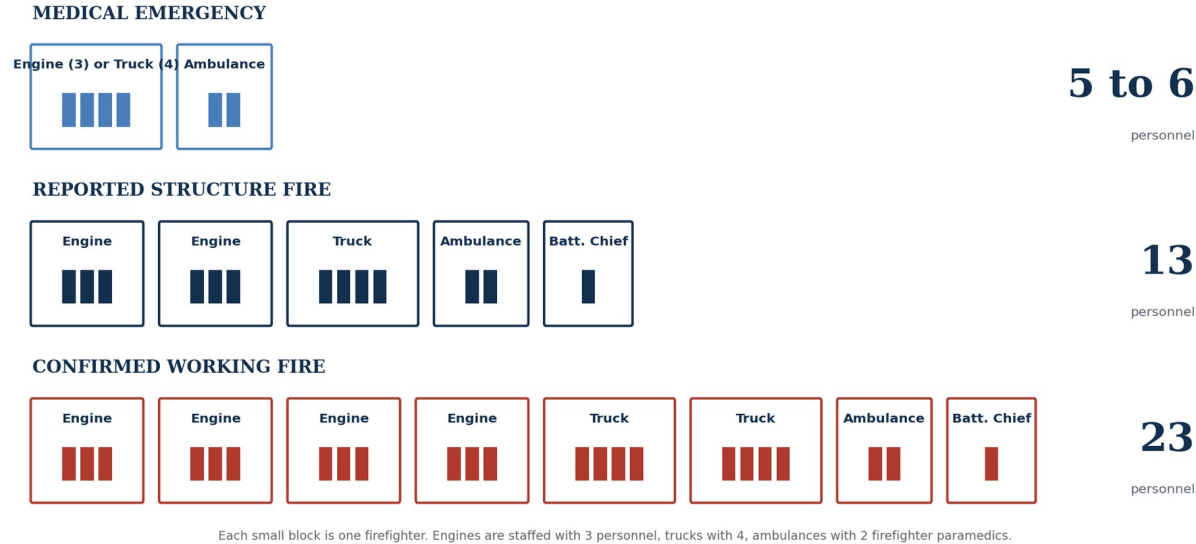


Figure 1. The response builds with the emergency. Each small block represents one firefighter. A confirmed working fire assembles 23 personnel.

Fireground research by the National Institute of Standards and Technology demonstrates that the speed with which an effective complement of personnel is assembled on scene directly determines the completion time of time-critical tasks including search, rescue, and fire attack.^[8] Survival from out-of-hospital cardiac arrest declines by approximately 7 to 10 percent for each minute that passes without intervention.^[9]

1.3 The 2022 Standards of Coverage Study

The 2022 study documented first-due travel performance exceeding the four-minute objective in the southeastern residential areas served by Station 3, including the Port Streets and the Bonita Canyon corridor. Its principal remedy was the addition of stations, including a new station in the vicinity of Bonita Canyon Sports Park near San Miguel Drive and Ford Road.^[4] The study’s deployment models held all existing station locations fixed. Relocation of any station, including relocation of Station 3 to the Avocado Avenue site, was outside its scope and was not evaluated. Four years after the study’s publication, the recommended ninth station has not advanced: the City does not control a site, and no funding for land, construction, or a permanent additional crew has been programmed. The travel time deficiencies documented in 2022 remain in place today.

2. Network Response Analysis

Travel times were computed on a road-network model of the Newport Center, Eastbluff, Harbor View, and Corona del Mar street system using shortest-path routing over the arterial, collector, and residential segments used by responding apparatus. Segment distances are calibrated to figures published in the June 10, 2025 City staff report.^[11] Time components follow NFPA 1710: 80 seconds turnout for fire and special operations, 60 seconds for emergency medical responses, a four-minute first-due travel objective, and an eight-minute travel objective for assembly of the initial full alarm, each at the 90th percentile.^[7] Modeling considerations and limitations are stated in Section 6.

2.1 First-Due Travel Time by Area

Estimated travel time of the first-arriving unit from any Newport Beach fire station, light traffic, shown in minutes and seconds. Most of the city is unaffected by the relocation because its first-due station does not change.


Area	Current	Standard	Proposed	Standard	Change	Basis
Harbor View / Port Streets	5:15	Does not meet	2:52	Meets	-2 min 23 sec	Measured
Harbor Hills Views / Spyglass	4:41	Does not meet	2:52	Meets	-1 min 49 sec	Measured
Bonita Canyon / Ford Road	4:49	Does not meet	3:43	Meets	-1 min 06 sec	Measured
Fashion Island	1:54	Meets	1:33	Meets	-21 sec	Estimated
Westcliff / Dover Shores	2:10	Meets	2:10	Meets	No change	Estimated
Newport Heights	1:44	Meets	1:44	Meets	No change	Estimated
Santa Ana Heights	1:32	Meets	1:32	Meets	No change	Estimated
Newport Ridge	1:32	Meets	1:32	Meets	No change	Estimated
Cypress at Pacific Ridge	3:22	Meets	3:22	Meets	No change	Estimated
Corona del Mar	under 1:00	Meets	under 1:00	Meets	No change	Estimated
Balboa Island	1:46	Meets	1:46	Meets	No change	Estimated
Lido Isle	1:51	Meets	1:51	Meets	No change	Estimated
Balboa Peninsula	1:27	Meets	1:27	Meets	No change	Estimated
Balboa Pier	1:29	Meets	1:29	Meets	No change	Estimated
The Bluffs	3:15	Meets	3:36	Meets	+21 sec	Estimated
Corona del Mar High School	2:14	Meets	3:09	Meets	+55 sec	Measured
Sea Island	1:58	Meets	3:08	Meets	+1 min 10 sec	Measured
Eastbluff	2:39	Meets	3:52	Meets	+1 min 13 sec	Measured
Park Newport	1:32	Meets	2:49	Meets	+1 min 17 sec	Measured

Table 2. Estimated first-due travel time by area, first-arriving unit from any station, current and proposed configurations. Standard refers to the NFPA 1710 four-minute first-due travel objective. Measured denotes commercial-mapping driving


routes verified by the Association; estimated denotes geometric routing per Section 6. Times under one minute are shown as under 1:00. Total response from dispatch adds 60 to 80 seconds of turnout.

Under the relocation the Port Streets move from 5 minutes 15 seconds to 2 minutes 52 seconds, the Harbor Hills Views and Spyglass area from 4 minutes 41 seconds to 2 minutes 52 seconds, and the Bonita Canyon and Ford Road corridor from 4 minutes 49 seconds to 3 minutes 43 seconds, all on measured driving routes. Fashion Island also improves. Areas nearest the current station give back time while remaining within the four-minute objective: Eastbluff moves to 3 minutes 52 seconds, Park Newport to 2 minutes 49 seconds, Sea Island to 3 minutes 8 seconds, Corona del Mar High School to 3 minutes 9 seconds, and The Bluffs to 3 minutes 36 seconds. Ten areas are unaffected because their first-due station does not change. Section 2.3 addresses full-alarm assembly.

First-Due Travel Time by Area: First-Arriving Unit from Any Station, Light Traffic

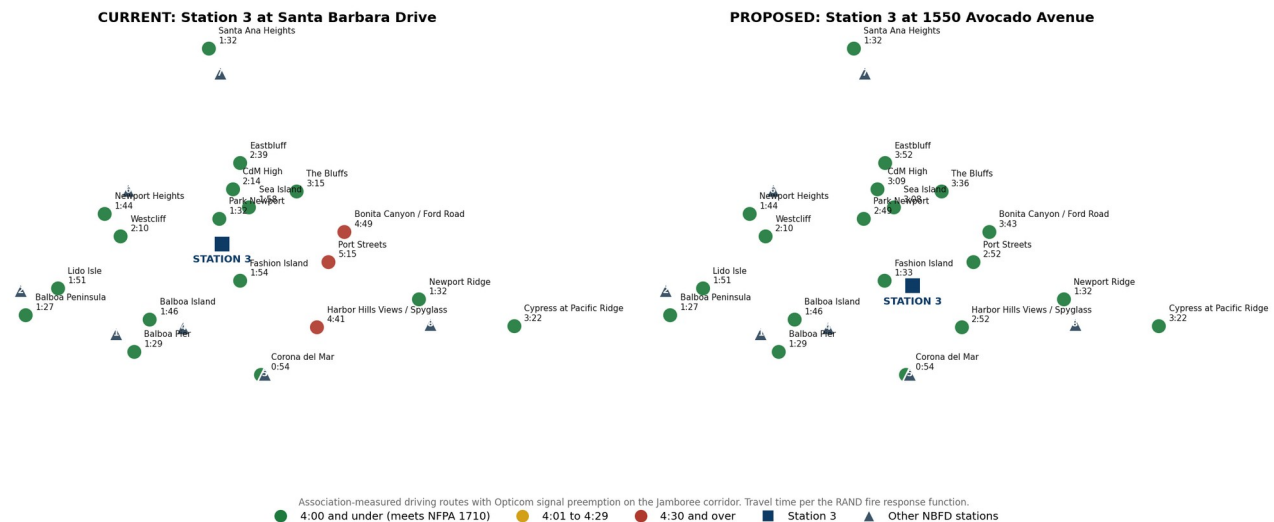

Map 1. First-due travel time by area, closest station, current configuration (left) and proposed configuration (right). Green markers are within the NFPA 1710 four-minute objective, yellow markers are between four and five minutes, red markers exceed five minutes. Times reflect the first-arriving unit from any station; contested corridors use measured driving routes.

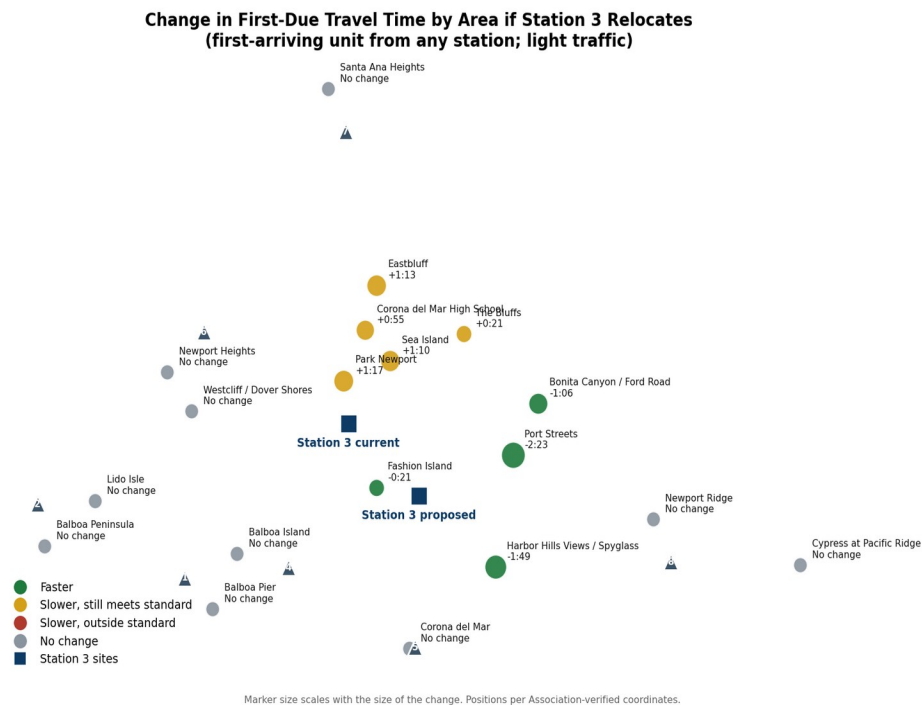

Map 2. Net change in first-due travel time by area under the proposed relocation. Green indicates faster response, gray unchanged, yellow slower but within five minutes, red slower and over five minutes. Marker size scales with the magnitude of change. The areas of improvement correspond to the travel time deficiencies documented in the 2022 Standards of Coverage study.

2.2 Medical Response, Eastbluff Corridor

Configuration	Units	Light traffic	Moderate	Heavy
Current (Santa Barbara Dr)	Engine 3, Medic 3	4.6	5.5	6.5
Proposed (Avocado Ave)	Engine 3, Medic 3	5.3	6.3	7.6

Table 3. Estimated arrival of the first medical response (minutes from dispatch: turnout plus travel) for an Eastbluff medical emergency under three traffic conditions.

Under the current configuration Station 3 provides Eastbluff's first medical response at 2 minutes 39 seconds travel on a measured 1.4 mile route. Under the proposed configuration the same units respond over a measured 2.1 mile route at 3 minutes 52 seconds, within the four-minute objective. Both figures include Opticom preemption on the Jamboree corridor.

2.3 Structure Fire and Traffic Collision Response

Structure fire and traffic collision responses dispatch an identical complement and produce identical figures. Tables 4 and 5 present unit-by-unit arrival estimates for the Eastbluff corridor and the Port Streets under both configurations.

Unit	Miles (cur / prop)	Light (cur / prop)	Heavy (cur / prop)
Engine 3	1.65 / 2.05	4.9 / 5.6	6.9 / 7.9
Truck 3	1.65 / 2.05	4.9 / 5.6	6.9 / 7.9
Medic 3	1.65 / 2.05	4.9 / 5.6	6.9 / 7.9
Battalion Chief*	1.65 / 2.05	4.9 / 5.6	6.9 / 7.9
2nd Engine (Sta 7)	2.40 / 2.40	7.0 / 7.0	10.2 / 10.2

Table 4. Eastbluff corridor, structure fire dispatch: estimated unit arrivals in minutes from dispatch, current and proposed configurations. The battalion chief figure assumes quartering at Station 3.

In the Eastbluff corridor the first-arriving engine changes from Station 3 (4 minutes 42 seconds from dispatch, including turnout) to Station 7 (5 minutes 23 seconds), with Station 3's engine, truck, and ambulance arriving at 5 minutes 43 seconds. The balance of the citywide force arrives on an identical schedule under either configuration, and full first-alarm assembly remains within the NFPA 1710 objective of 80 seconds turnout plus eight minutes travel.

Unit	Miles (cur / prop)	Light (cur / prop)	Heavy (cur / prop)
Engine 3	2.60 / 1.60	7.1 / 4.8	10.2 / 6.6
Truck 3	2.60 / 1.60	7.1 / 4.8	10.2 / 6.6
Medic 3	2.60 / 1.60	7.1 / 4.8	10.2 / 6.6
Battalion Chief*	2.60 / 1.60	7.1 / 4.8	10.2 / 6.6
2nd Engine (Sta 5)	2.95 / 2.95	7.2 / 7.2	10.4 / 10.4

Table 5. Port Streets, structure fire dispatch: estimated unit arrivals in minutes from dispatch, current and proposed configurations.

In the Port Streets, first water, first ladder, first ambulance, and command arrive at an estimated 4 minutes 12 seconds from dispatch under the proposed configuration, compared with 6 minutes 35 seconds under the current configuration, a measured-route improvement of 2 minutes 23 seconds.

Confirmed Working Fire: How Fast the Force Assembles

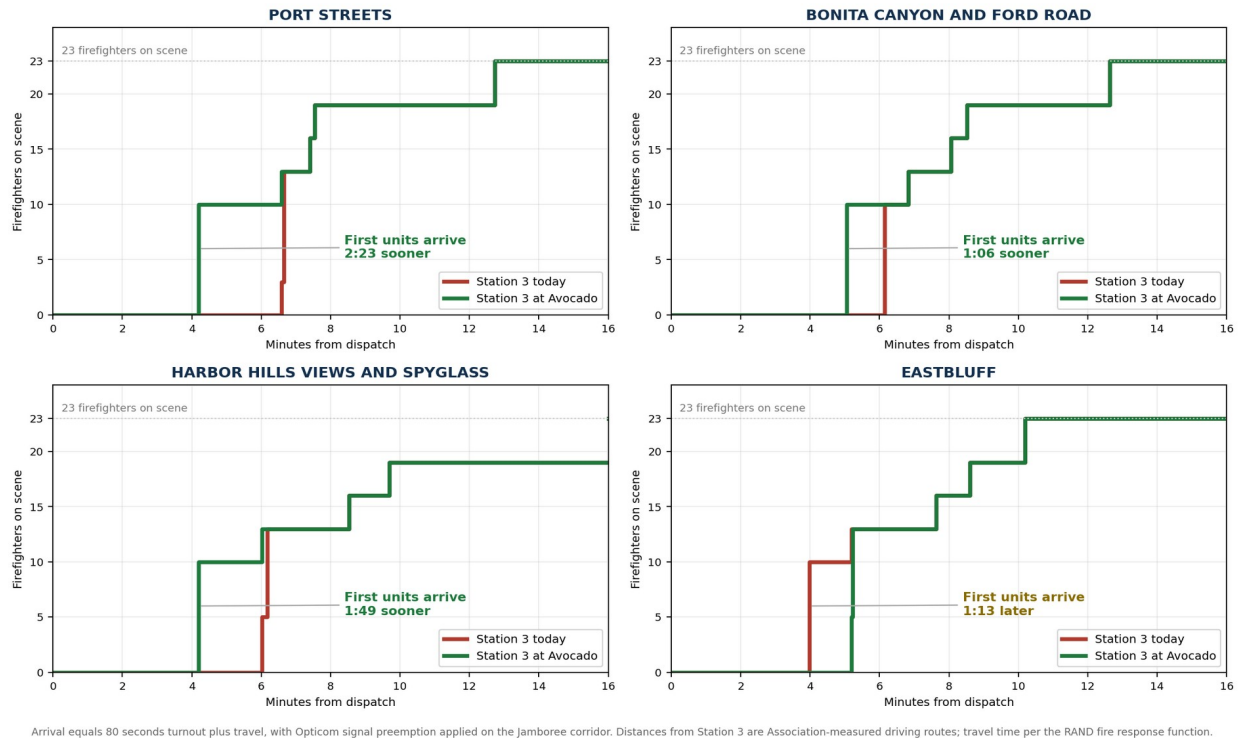


Figure 2. Firefighters on scene over time, confirmed working fire (23 personnel), light traffic. In the Port Streets, the Bonita Canyon and Ford Road corridor, and the Harbor Hills Views and Spyglass area, the first engine, truck, and ambulance arrive substantially sooner under the proposed configuration. In Eastbluff they arrive 71 seconds later. In every case the balance of the citywide force arrives on an identical schedule, because no other station moves.

2.4 The Same Crews, Serving More People, Serving Families Faster

Newport Beach cannot afford to add a new fire station on every block, and the firefighters of this city are not asking it to. Together, the City can take this opportunity to place its next investment in a location that reaches the most people the fastest. That is what this relocation does, and it is why firefighters consider this a true public safety investment.

Coverage should not depend on which side of the city a household happens to be on. At present the Port Streets wait more than five minutes for a first unit while other neighborhoods see one in under two. Relocating Station 3 closes that spread without taking protection away from anyone: no neighborhood loses its first-due station, no area falls outside the four-minute objective, and the citywide worst case drops from 5 minutes 15 seconds to 3 minutes 52 seconds. Every household in Newport Beach ends up on the right side of the four-minute line.

That is the most honest definition of good stewardship the Association knows.

3. The Newport Transportation Center

The Avocado Avenue parcel cannot serve both a fire station and a bus interchange. A fire station generates unannounced heavy apparatus egress under emergency conditions; a transit center concentrates dwelling buses and pedestrian activity at the same curb and driveway space a station apron requires. If the fire station belongs at the Avocado Avenue site for response coverage reasons, the transit function must be accommodated elsewhere, fully and properly.

The framework in place accomplishes that. The City and OCTA have executed a cooperative agreement and a term sheet governing a relocation feasibility study,^[5] with the City funding the work,^[4] and preservation of transit function, Federal Transit Administration property disposition requirements, and grantor concurrence stated as conditions.^[3] Support for examining the relocation has been publicly reported from the Teamsters union representing transit workers,^[10] and the City Council's July 28, 2026 direction to initiate a memorandum of understanding passed 7-0.^[6] No rider loses service under this framework: a replacement facility is the premise of the process, not an afterthought.

4. Fiscal Considerations

Two paths exist to address the travel time deficiencies documented in 2022. The figures below are planning assumptions, stated for comparison. This analysis assigns no value to, and assumes no disposition of, the Santa Barbara Drive property.

Element	New ninth station (2022 study concept)	Relocation of Station 3
Land	Not City-controlled; acquisition or park conversion required	Site secured through the City and OCTA process
Station construction	Approximately \$18.5M	Approximately \$18.5M
Apparatus	\$2.5M to \$3.5M, new engine company	None; existing units redeploy
Transit replacement facility	Not applicable; transit siting unresolved	\$10M to \$15M, subject to feasibility study

Permanent incremental staffing	12 to 15 positions, approximately \$4M per year	None
---------------------------------------	--	-------------

Table 6. Planning-level comparison of the two available coverage remedies. Construction figure applies the City's published rebuild estimate to both paths. Personnel cost assumes a three-person company across three shifts with standard relief factors.

Personnel, not construction, dominate the lifecycle cost of fire protection. The relocation captures the principal coverage improvement with existing crews, resolves the transportation center siting through a funded joint process, and forecloses no future option, including a northern area station should a future council fund one.

5. NBFA Facts

False claims are circulating publicly regarding the proposed relocation. The following presents the record.

Some claim the relocation is the project of a single elected official.	The record shows otherwise. The June 10, 2025 request to OCTA passed the City Council 6-0. The July 28, 2026 direction to initiate a memorandum of understanding passed 7-0. The relocation is supported by the Newport Beach Firefighters Association and by fire department and police department leadership. Recorded unanimous votes are the action of a council, not a person.
Some claim the City's 2022 fire study recommended against the relocation.	The 2022 study made no finding on the Avocado Avenue site. Its deployment models held all eight stations fixed, and relocation of any station was outside its scope. The same study documented the southeastern travel time deficiencies that the relocation addresses. The absence of a recommendation from a study that never evaluated the site is not a recommendation against it.
Some claim the relocation would degrade response to Eastbluff and nearby neighborhoods.	Every area evaluated meets the national four-minute standard under the proposed configuration, including Eastbluff. On measured driving routes with the City's existing signal preemption, Eastbluff moves from 2 minutes 39 seconds to 3 minutes 52 seconds and Corona del Mar High School from 2 minutes 14 seconds to 3 minutes 9 seconds, both inside the standard. In exchange the Port Streets gain 2 minutes 23 seconds and the Bonita Canyon and Ford Road corridor gains 1 minute 6 seconds, both moving from outside the standard to inside it. Two areas fail the standard today; none does under the relocation.
Some claim the relocation exists to clear land for development.	The Newport Beach Firefighters Association supports moves that improve public safety, and this move improves public safety; that is why the Association supports it. The documented and recorded basis for the relocation is response coverage, established in unanimous public votes. Handwritten staff meeting notes recording exploratory options are not adopted policy, are not a plan, and are not a council action; no disposition of the Santa Barbara Drive property has been approved, negotiated, or brought to council, and this analysis assumes none.
Some claim OCTA opposes the relocation of the transportation center.	OCTA has executed a cooperative agreement and a term sheet governing a jointly overseen relocation feasibility study, with Federal Transit Administration requirements and grantor concurrence as express conditions and a replacement facility as the premise. The City funds the study, as the initiating party should. That is a governed process, not opposition.
Some claim transit riders would be harmed.	A replacement facility is a condition of the framework, and support for examining the relocation has been publicly reported from the union representing transit workers. The feasibility study exists to ensure riders are served as well or better, with federal requirements as a hard gate.

6. Methodology and Modeling Considerations

First-due figures reflect the first-arriving unit from any Newport Beach fire station. Driving distances from both Station 3 locations to every affected area are measured commercial-mapping routes verified by the Association. From the current station: Port Streets 2.8 miles, Bonita Canyon and Ford Road 2.5, Harbor Hills Views and Spyglass 2.5, Eastbluff 1.4, Corona del Mar High School 1.1, Sea Island 0.9, Park Newport 0.6. From the Avocado Avenue site: 1.3, 1.8, 1.3, 2.1, 1.6, 1.6, and 1.4 miles respectively. Station 7 measures 2.2 miles to Eastbluff and 2.5 miles to the high school. Remaining station-to-area pairs use geometric estimates with corridor factors accounting for Upper Newport Bay, the harbor, and the hillside routings into Harbor View Hills and Spyglass, where apparatus climb by way of Marguerite Avenue and San Joaquin Hills Road. The Station 5 leg into the Spyglass area is an estimate of approximately 2.4 miles and should be replaced with a measured route when available. Distance converts to travel time using the RAND fire response function, travel time in minutes equal to 0.65 plus 1.7 times distance in miles, a standard planning relationship in fire deployment analysis. All figures are light-traffic estimates. The measured figures are consistent with the approximate distances published in the June 10, 2025 City staff report.

Figures include Opticom traffic signal preemption, which the City has installed on the Jamboree corridor at Bayview, Eastbluff, Bison, Laurel and Arrow, Eastbluff and Ford, San Joaquin Hills, Santa Barbara, and Island Lagoon.^[13] Preemption is modeled as a 20 percent travel-time reduction applied to the share of each route that runs on the Jamboree corridor, so that both the current and the proposed configuration receive it in proportion to actual use. Without preemption, Eastbluff estimates at 4 minutes 13 seconds under the proposed configuration rather than 3 minutes 52 seconds; the Port Streets and Bonita Canyon results are essentially unchanged because those routes run on San Joaquin Hills, MacArthur, and Ford rather than Jamboree.

Prior to drawing conclusions from this analysis, the following should be taken into consideration:

- Modeled travel speeds represent planning-level effective response speeds. Actual speeds may be slower with traffic incidents, work zones, weather, special events, signal operations, or roadway capacity constraints.
- The model does not incorporate incident-level historical dispatch data, seasonal event loads, or the timing of individual traffic signals.
- Computer modeling considers travel time only. Turnout time is applied per NFPA 1710; alarm handling time of approximately 64 seconds precedes both and is reported separately where noted.
- Larger apparatus are more cumbersome to maneuver, and modeled figures assume units are in quarters and available at dispatch.
- Second-due engine assignments are modeled as Station 7 for the Eastbluff corridor and Station 5 for the Port Streets corridor; battalion chief quartering is assumed at Station 3.

6.1 Educational Use and Limitations

This analysis is provided for educational and informational purposes only. It is not a guarantee of response.

The figures in this report are not drawn from Newport Beach Fire Department computer-aided dispatch records. They are built from publicly available geographic information and mapping systems, including current traffic-aware routing, combined with the RAND fire response travel-time model and the turnout times published in NFPA 1710, in order to produce reasonable and defensible planning estimates of travel and response time.

Actual response times may be longer. Crew status, system status, apparatus placement, concurrent incidents, traffic, weather, and other conditions outside the scope of this report all affect how quickly help arrives. Nothing in this report should be relied upon as a commitment or prediction of the response to any particular emergency. **In an emergency, dial 911.**

The intent of this report is to present a clear, factual, and meaningful analysis showing that relocating Fire Station 3 from its current location to the transit center site will help Newport Beach firefighters save lives, protect property, and improve the quality of public safety across Newport Beach.

References

- [1] Emergency Services Consulting International (April 2022). City of Newport Beach Fire Department Standards of Coverage and Deployment Plan.
- [2] City of Newport Beach (June 10, 2025). City Council staff report and action: letter to the Orange County Transportation Authority requesting consideration and support for the relocation of Fire Station 3 to 1550 Avocado Avenue. Approved 6-0.
- [3] Orange County Transportation Authority (August 2025). Correspondence to the City of Newport Beach regarding the Newport Transportation Center: preservation of transit function, Federal Transit Administration property disposition requirements, and grantor concurrence.
- [4] Orange County Transportation Authority (January 2026). Agreement with HDR Engineering, Inc. for a relocation feasibility study of the Newport Transportation Center.
- [5] Orange County Transportation Authority (June 2026). Board file 26-7018: Term Sheet Agreement with the City of Newport Beach for the Potential Relocation of the Newport Transportation Center.
- [6] City of Newport Beach (July 28, 2026). City Council action directing a letter to the Orange County Transportation Authority to initiate a memorandum of understanding regarding relocation of the Newport Transportation Center. Approved 7-0. Resolution number and minutes to be appended upon posting.
- [7] National Fire Protection Association. NFPA 1710: Standard for the Organization and Deployment of Fire Suppression Operations, Emergency Medical Operations, and Special Operations to the Public by Career Fire Departments.
- [8] Averill, J.D. et al. (2010). Report on Residential Fireground Field Experiments. NIST Technical Note 1661. National Institute of Standards and Technology, Gaithersburg, MD.
- [9] American Heart Association. Out-of-hospital cardiac arrest survival declines by approximately 7 to 10 percent for each minute without cardiopulmonary resuscitation or defibrillation.
- [10] Daily Pilot / Los Angeles Times (July 2, 2025). Coverage of the proposed Station 3 relocation and Newport Transportation Center, including reported support from the Teamsters union representing transit workers.
- [11] Newport Beach Firefighters Association (July 2026). Response model documented in the Methodology section of this report: measured commercial-mapping driving routes for contested corridors, geometric estimates elsewhere, RAND fire response travel-time function.
- [12] RAND Fire Project (Kolesar and Walker). Empirical fire apparatus travel-time function, $T = 0.65 + 1.7 D$, widely applied in fire station location analysis.
- [13] City of Newport Beach Public Works. Traffic signal preemption (Opticom) equipment locations on the Jamboree Road corridor. Electronic Content Management System, document 3157227: <https://ecms.newportbeachca.gov/WEB/DocView.aspx?id=3157227&dbid=0&repo=CNB>